

# Refrigerated Display Cases

SUSHI  
TAPAS




With many different versions of refrigerated display cases, Asber combines a **stylish European curve glass design** with a robust refrigeration system and cold plate floors to ensure proper temperature throughout the cabinet. For Sushi Cases we have added a top gravity coil along with a cold plate bottom for proper display of delicate products.

Interior will allow up to **11.5" plates for display** thru a rear service door which is ideal for most applications. Interior grate can be turned upside down to increase overall internal height and cooling capacity.

Many other features to include:

- Hermetic compressors with epoxy coated evaporator
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display
- Temperature: Tapas 36°F to -46°F / Sushi 32°F to -41°F based on an external environment of 90°F and 65% RH.
- LED interior lights: shadow-free illumination, last up to 10 times longer than fluorescent light, enhance product display.
- Interior stainless-steel construction with plastic ends and anodized aluminum profile.
- Refrigeration system with R-134A gas, CFC free.
- Compressor on the right side facing the unit.
- Includes drain underneath pans to keep unit clean.

**\*\* Refrigerated Display Case - Not for overnight storage.**

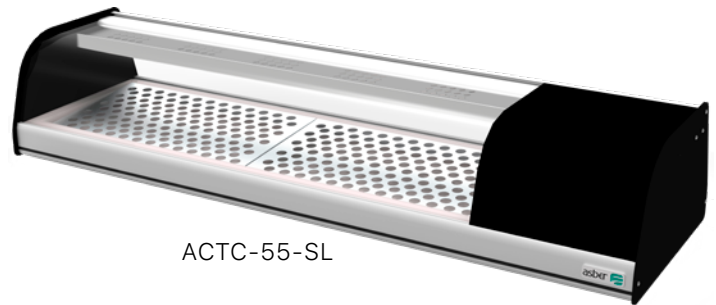

ACTC-55-SL



ACTC-69

## OPTIONS & ACCESORIES

Voltage: 220V. - 1 - 50Hz.

|            | MODEL      | DOORS | CAPACITY (ft <sup>3</sup> ) | AMPS | HP  | VOLTS  | DIMENSIONS |         |                     | SHIPPING WEIGHT (lbs) |
|------------|------------|-------|-----------------------------|------|-----|--------|------------|---------|---------------------|-----------------------|
|            |            |       |                             |      |     |        | Width      | Depth   | Height <sup>1</sup> |                       |
| TAPAS LINE | ACTC-55    | 2     | 9.0                         | 2.5  | 1/6 | 115/60 | 54 5/8"    | 16 1/8" | 10 1/4"             | 119                   |
|            | ACTC-69    | 2     | 13.9                        | 2.5  | 1/6 | 115/60 | 68 3/8"    | 16 1/8" | 10 1/4"             | 135                   |
| SUSHI LINE | ACTC-55-SL | 2     | 9.0                         | 2.5  | 1/6 | 115/60 | 54 5/8"    | 16 1/8" | 10 1/4"             | 125                   |
|            | ACTC-69-SL | 2     | 13.9                        | 2.5  | 1/6 | 115/60 | 68 3/8"    | 16 1/8" | 10 1/4"             | 145                   |


\* No incluye insertos. 1) Especificaciones sujetas a cambios sin previo aviso.

# Refrigerated Display Cases


SUSHI  
TAPAS




ACTC-55 FRONT

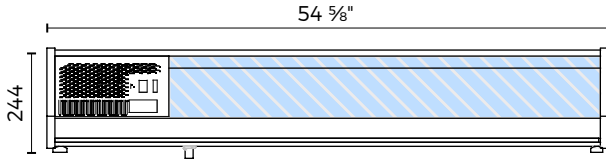


ACTC-69 FRONT

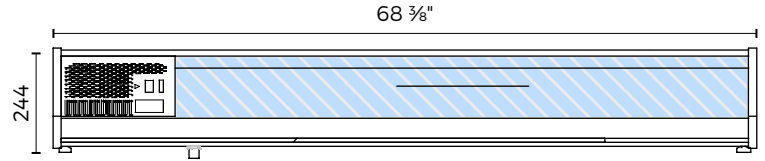


ACTC-55 FRONT

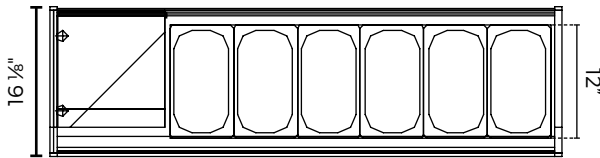

ACTC-69 FRONT

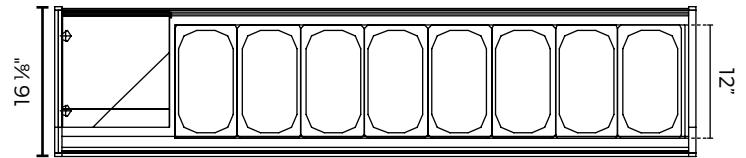

COMMON SIDE VIEW



| ELECTRICAL DATA        | 55"        |       | 69"     |       |
|------------------------|------------|-------|---------|-------|
|                        | Tapas      | Sushi | Tapas   | Sushi |
| Voltage                | 115/60     |       |         |       |
| Plug Type              | Nema 5-15P |       |         |       |
| Full Amp. Loads        | 2.5        |       |         |       |
| Compressor HP          | 1/6        |       |         |       |
| Cord Length (ft)       | 10         |       |         |       |
| Refrigerant            | R-134 A    |       |         |       |
| DIMENSIONAL DATA       | 55"        |       | 69"     |       |
|                        | Tapas      | Sushi | Tapas   | Sushi |
| # of Doors             | 2          |       |         |       |
| Capacity (Cu. Ft.)     | 9.0        |       | 13.9    |       |
| Ext. Width Overall     | 54 5/8"    |       | 68 3/8" |       |
| Ext. Depth Overall     | 16 1/8"    |       |         |       |
| Ext. Height Overall    | 10 1/4"    |       |         |       |
| # of Pans              | 6          | N/A   | 8       | N/A   |
| Plates Size            | 12"        |       |         |       |
| Shipping Weight (lbs.) | 119        | 125   | 135     | 145   |

1. Sushi cases do not include pans.

## Standard Features

- Compressor on the right side facing the unit.
- Electronic controller with digital display
- Temperature: Tapas 36°F to -46°F / Sushi 32°F to -41°F based on an external environment of 90°F and 65% RH.
- LED interior lights: shadow-free illumination, last up to 10 times longer than fluorescent light, enhance product display.
- Self-contained Refrigeration with epoxy coated evaporator.
- Includes drain underneath pans to keep unit clean.

## Options & Accesories Warranty

- Voltage: 220V. – 1 – 50 hz.

- 1-year parts & labor.
- 5-year compressor.

\*RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

Design and specifications are subject to change without prior notice.